

## FLAME RETARDANT PVC INSULATED SINGLE CORE MULTI-STRAND COPPER UNSHEATHED CABLE (FR)

### PRODUCT FEATURES

- **Conductor:** Electrolytic grade bright annealed copper.
- **Insulation:** FR grade PVC.
- **Oxygen Index:** Minimum 29%.
- **Temperature Index:** Minimum 250°C at 21% Oxygen Index.
- **Insulation Colours:** Red, Yellow, Blue, Green, Black, Grey, White.
- **Size:** From 0.5mm<sup>2</sup> upto 25mm<sup>2</sup>




**PACKING:** 90 meters in box packing, 200 meters in polybag packing.

\*Bigger length and special colours are available on demand.

### APPLICATION RANGE

- Building cable for installation on wall surface or in concealed conduits.
- For lighting & power application in buildings-residential, commercial, hotels, hospitals & IT parks.

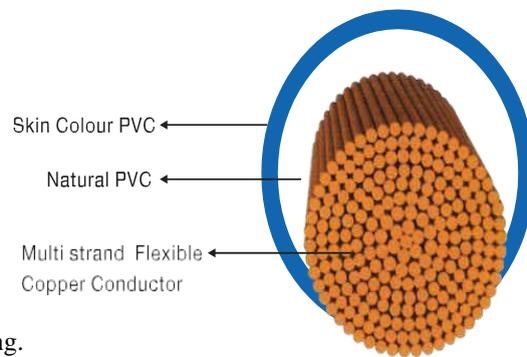




## MULTI CORE CABLES (ROUND)


### PRODUCT FEATURES

- **Conductor:** Electrolytic grade bright annealed copper.
- **Sheath & Insulation:** Flame retardant PVC Jacket with individual single core insulation.
- **Sheath & Insulation Colour:** Black, White (any colour on demand) and core insulation is available in Red, Yellow, Blue, Green and Black or as per BIS Norms.
- **Size:** upto 19 core with a maximum size limit of 240 mm<sup>2</sup>.

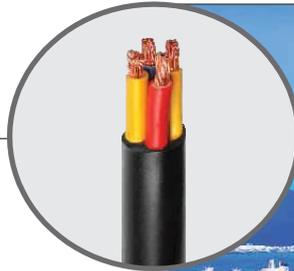

### APPLICATION RANGE

- Suited for use in multiphase application, industrial use and for commercial uses.

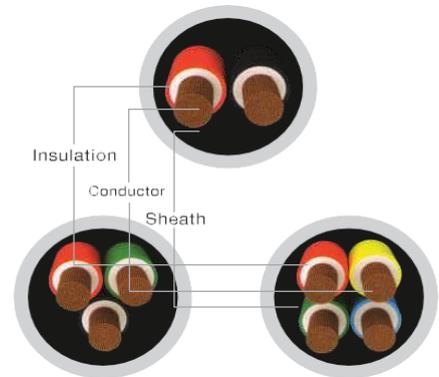

**PACKING:** 0.5mm<sup>2</sup> to 10.0mm<sup>2</sup> in 2core, 3core, 4core.

\*Bigger length and special colours are available on demand.



## MULTI CORE CABLES (FLAT)


### PRODUCT FEATURES


- **Conductor:** Electrolytic grade bright annealed copper conductor. These cables have low conductor resistance.
- **Insulation:** The inner cores are insulated with a special grade PVC formulated compound.
- **Sheath:** The tough robust outer PVC Jacket protects it from the oils, greases and various chemicals, thereby giving long life and electrical safety.
- **Sheath & Insulation Colour:** Black, Grey, (any other colour on demand) and core insulation is available in Red, Yellow, Blue, Green & Black Colours.
- **Size:** 1.50mm<sup>2</sup>, 2.50mm<sup>2</sup>, 4.0mm<sup>2</sup>, 6.0mm<sup>2</sup>, 10.0mm<sup>2</sup> in 3 and 4 core.



### APPLICATION RANGE

- Used for supplying electrical connection to the submersible pump motors.

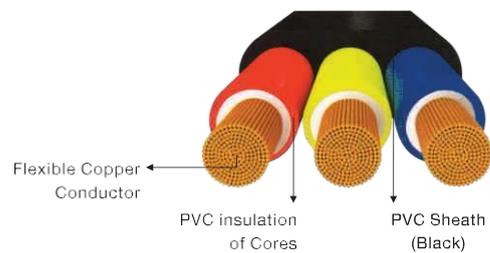

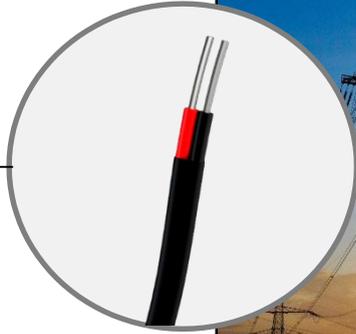


## ALUMINIUM TWIN CABLE


### PRODUCT FEATURES

- **Conductor** – Aluminium are stranded round or compact.
- **Core Insulation** – FR and Weather proof grade PVC.
- **Size** – 1.5mm – 25.0mm
- **Colour** – White and Black in 2,3 & 4 cores
- **Length** – 90 meters per coil

### APPLICATION RANGE

Wiring power grids, including overhead power transmission lines & local distribution lines.

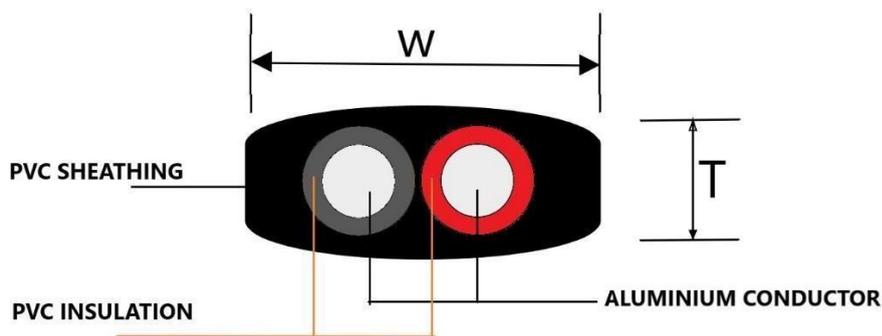


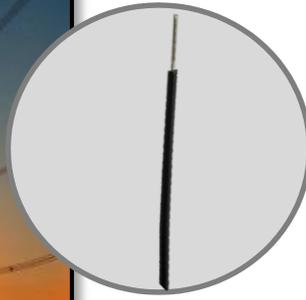

## ALUMINIUM SINGLE CORE CABLE

### PRODUCT FEATURES

- **Conductor** – Aluminium are stranded round or compact.
- **Core Insulation** – FR and Weather proof grade PVC.
- **Size** – 1.5mm – 70.0mm
- **Colour** – Black
- **Length** – 90 meters per coil

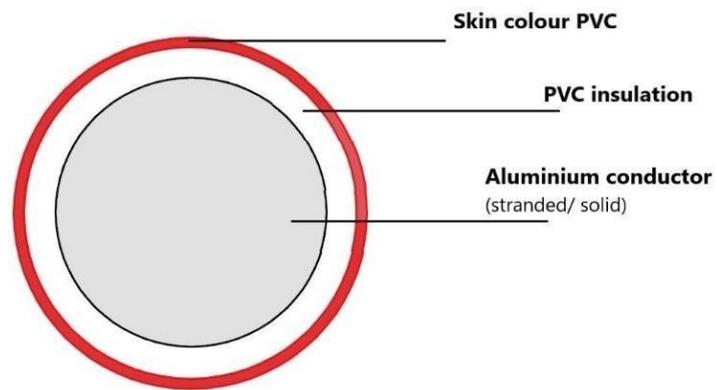




## TWISTED FLEXIBLE WIRE

### PRODUCT FEATURES

- **Conductor** – Bare annealed electrolytic grade copper
- **Core Insulation** – Virgin grade natural PVC
- **Size** – 10/76, 14/76, 18/76, 23/76, 30/76, 40/76
- **Colour** – White with colour lining.
- **Length** – 90 meters per coil

### APPLICATION RANGE

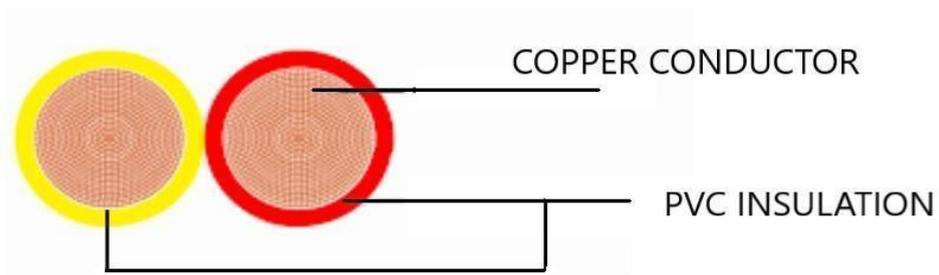

Widely used in light load connections and electrical appliances due to their flexibility.

## GET *CONNECTED*, STAY *CONNECTED*



Want to talk to someone?  
Just call us at  
(+91)6392959815, 0522-4304696



Connect with our online community of users  
and fans to know what's hot and what's not at  
[www.facebook.com/rdavedanta](http://www.facebook.com/rdavedanta)



Email us your queries  
or requirements at  
[rdaelectricalspvtltd@gmail.com](mailto:rdaelectricalspvtltd@gmail.com)



Watch our videos and demos,  
and get familiar with us.  
[www.youtube.com/rdavedanta](http://www.youtube.com/rdavedanta)



For more updates get  
connect at Instagram  
[rda\\_vedanta](https://www.instagram.com/rda_vedanta)

### Disclaimer:

- All data is based on standard test conditions of laboratory. It may vary from place to place due to change in external/onsite conditions.
- The data here is indicative & may be revised without prior intimation. The company reserves the right to modify or change the product design, specification in the future without prior intimation.
- Company shall not be liable for any damages arising out of incorrect use or misinterpretation of information given here.
- Limitation of liability :The company shall not be liable for any special, indirect, incidental or consequential damages what so ever including but not limited to loss of profit, revenue, or data whether direct or indirect or commercial loss for breach of any express or implied warranty on your product even if company has been advised of the possibility of such damages.
- Misuse of any intellectual property, or any other content displayed here in is strictly prohibited.
- The print processes does not allow for exact reproduction of the material, color and finishes of the product. Actual product may vary from product shown in this catalogue.

**Note :** \*Bigger lengths and special colours availability is subjected to mutually agreed terms & conditions of time, price, quantity and packing.



# CERTIFICATES

## BUREAU OF INDIAN STANDARDS

Attachment to Licence No. CM/L- 8863096

CML-No	Name of the Licensee with the Factory Address	Name of the Product	Indian Standard No.
8863096	VEENA ENTERPRISES -A-6/B, 2nd Floor, Jhilmil Industrial Area, GT Road, , DELHI : 110095	POLYVINYL CHLORIDE INSULATED UNSHEATHED AND SHEATHED CABLES CORDS WITH RIGID AND FLEXIBLE CONDUCTOR FOR RATED VOLTAGES UP TO AND INCLUDING 1100 V	IS 694 : 2010

Endorsement No. 15 Dated 08-Jul-2021

Whereas, the licence was valid upto Thirty September Two Thousand Twenty. Now, consequent upon renewal, the validity of the licence given in schedule of the Licence has been extended from First October Two Thousand Twenty to Thirty September Two Thousand Twenty One. Other terms and conditions of licence remain same.

Rosy Dhawan,  
Sd.F & Head (DLBO-II)

**ROSY DHAWAN**  
Digitally signed by ROSY DHAWAN, DN: cn=ROSY DHAWAN, o=Director General, ou=Director General, email=rosydhawan@bisc.gov.in, c=IN, date=2021.07.08 12:07:00 +05'30'



### Certificate of Registration

This certificate has been awarded to

**Veena Enterprises**  
 A-6/B, Second Floor, Jhilmil Industrial Area, G.T. Road, Shahdara, East Delhi, Delhi, 110095, India

in recognition of the organization's Quality Management System which complies with

**ISO 9001:2015**

The scope of activities covered by this certificate is defined below

**Manufacture and Supply of Insulated Wires and Cables**

Certificate Number: 49818/A/0001/UK/EN

Date of issue: (Original) 30 September 2011

Date of issue: 16 December 2020

Issue No: 5

Expiry Date: 29 September 2023

Issued by: 

On behalf of the Scheme Manager






Page 1 of 1



भारत सरकार  
**GOVERNMENT OF INDIA**  
व्यापार चिन्ह रजिस्ट्री  
**TRADE MARKS REGISTRY**  
व्यापार चिन्ह अधिनियम, 1999  
**Trade Marks Act, 1999**  
व्यापार चिन्ह के रजिस्ट्रीकरण का प्रमाणपत्र, धारा 23 (2) नियम 62 (1)  
**Certificate of Registration of Trade Mark, Section 23 (2), Rule 62 (1)**

व्यापार चिन्ह संख्या/Trade Mark No.	1545388	दिनांक/Date	02/04/2007	न.जी.अंका/J.No/399
-------------------------------------	---------	-------------	------------	--------------------

वह समर्पित किया जाता है कि निम्न प्रकार चिन्ह की सहायक से दृश्य रूप से प्रदर्शन है, जो कि चारों में दिखता है

Certified that the Trade Mark / a representation is annexed hereto, has been registered in the name(s) of **SANJAY UGAJWAL, Trading as VEENA ENTERPRISES, 2nd Fl., GATE NO-4 TQ, KHANNA CO-POUND, FRIENDS COLONY INDUSTRIAL AREA, G.T. ROAD, DELHI-36, MERCHANTS AND MANUFACTURER, (Single Firm)**



VEDANTA

9 1545388 02 April 2007.

In Class Under No. as of the Date In respect of

**ELECTRICAL ACCESSORIES INCLUDING WIRE AND CABLES, CO-AXIAL WIRES AND ELECTRICAL BOARD SHEET.**

Sealed at my direction, this 16<sup>th</sup> March, 2010 day of Delhi

व्यापार चिन्ह रजिस्ट्री,  
Trade Marks Registry,

व्यापार चिन्ह रजिस्ट्रार  
Registrar of Trade Marks

रजिस्ट्रार को प्रमाणित करने के लिए यह प्रमाणपत्र 10 वर्षों के लिए है और अनुदान का 10 वर्षों की अवधि के लिए और प्रमाण के अभाव में रजिस्ट्रार के पास यह प्रमाणपत्र को 10 वर्षों के लिए नवीनीकरण करने का अधिकार है।  
 Registration is for 10 years from the date of application and may then be renewed for a period of 10 years and also at the expiration of each period of 10 years, the trademark holder has the right to renew the registration of the trademark.  
 This certificate is valid for use in legal proceedings or for obtaining Registration abroad.  
 (टिप्पणी - इस प्रमाणपत्र के अंतर्गत प्रमाणित करने वाले व्यापार चिन्ह का उपयोग केवल प्रमाण के रूप में या सचन में अर्थात् के बिना प्रमाणित करने वाले व्यापार चिन्ह के बिना प्रमाणित करने वाले व्यापार चिन्ह के लिए नहीं किया जा सकता है।)  
 Note: Upon any change of ownership of this Trade Mark, or change in address, of the principal place of business or address for service in India a request should be made to register the change.

ANNEXURE									
Sl. No.	वर्गीकरण का नाम	व्यापार चिन्ह	व्यक्ति का नाम	वर्गीकरण वर्ग	वर्गीकरण संख्या	वर्गीकरण तिथि	वर्गीकरण तिथि	वर्गीकरण तिथि	वर्गीकरण तिथि
1	VEDANTA			1- PVC Insulated FR & FR-LSH Single Core Copper Conductor Cable (0.5mm-10mm)	05/901/2015	10-26-12-21	12/06-14/02	17/06-18/07	21-09-18
2				2- PVC Insulated FR & FR-LSH Multi Core Copper Conductor Cable Round 2 & 5 Core 0.5mm to 10mm / 3 & 4 Core 0.5mm to 10mm / 6 & 8 Core 0.5mm to 10mm					
3				3- Polythene Braided Cable 2 to 4 Core 0.5mm to 16.0mm, 6 to 24 Core 0.5mm to 2.5mm					
4				4- Overall Shielded Armoured Insulation Cable copper PVC/PB, FR Insulated 0.5 to 10 Pair Size 0.5mm to 0.5mm, 10 to 24 Core 0.5mm to 2.5mm					
5				5- Co-Axial Cable FR-LSH REEF/FRONCOX/RS11/RS12/RS6	CM/L-8863096		01/04/2010	02/02/2021	
6				6- CO-AXIAL CABLE CAT 5E/6A/6					
7				7- CO-AXIAL CABLE CAT 5E/6A/6					
8				8- Aluminium Conductor FR Service Cable 2 core 2.5mm to 16mm					
9				9- 3 Core Submarine Cable 1.5mm to 16mm					
10				10- Shielded Telephone Cable 5 Pair to 200 Pair, Telephone Bell Cable 2 to 200 Pair					
11				11- Shielded wire 23/24/24/28, 28/28, 0.5mm to 2.5mm					

CNT. No.:

# CLIENTELE

## PUBLIC PARTNERS



## PRIVATE PARTNERS

